

ELMARK[®]

The Brand of Electricity

STELLAR LED STREET LIGHT TIVOLI

GENERAL INFORMATION »

- ∴ Input voltage: 110V-230V AC 50/60Hz
- ∴ Power: 100W; 150W; 200W
- ∴ LED driver: Isolated driver
- ∴ Colour temperature: 5500K
- ∴ Light source: SMD3030
- ∴ Beam angle: 135*75°
- ∴ Body: Aluminium/PC
- ∴ Colour rendering index: Ra≥ 70
- ∴ Average lifetime: 20 000h
- ∴ Protection against dust and moisture: IP65

FEATURES »

- ∴ Completely replaces traditional street lamps
- ∴ Ultra- thin design
- ∴ Wide distribution of homogeneous, highly efficient light
- ∴ Economic- low power consumption
- ∴ Repeated switch on/off does not effect the fixture lifespan
- ∴ Instant light at maximum luminous flux
- ∴ Environmentally friendly - no mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration stable body
- ∴ Voltage supply fluctuations do not affect the normal operation of the fixture



APPLICATION »


Widely used in main roads, highways, urban streets, flyover, schools, gardens, crosswalks and other road lighting and other places requiring outdoor lighting.



PRODUCT DETAILS »

Catalogue number	Watt (W)	Whole fixture lumens (lm)	Colour temp (K)	Beam angle	Colour body
98TIVOLI100SMD	100	11000	5500	135*75°	Grey
98TIVOLI150SMD	150	16500	5500	135*75°	Grey
98TIVOLI200SMD	200	22000	5500	135*75°	Grey

DIMENSIONS »

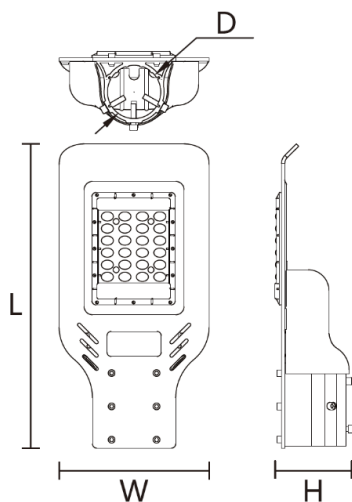

Model	Length (mm)	Height (mm)	Width (mm)	Diameter of the pole (mm)
98TIVOLI100SMD	485	65	145	60
98TIVOLI150SMD	545	75	205	60
98TIVOLI200SMD	625	75	235	60

[INSTALLATION ACCESSORIES »](#)



WALL MOUNTING ACCESSORIES

Diam.: 60mm

Catalogue number: 98POLE60



POLE MOUNTING ACCESSORIES

Diam.: 60mm

Catalogue number: 98POLE60P

[ADDITIONAL INFORMATION »](#)

Catalogue number	Barcode
98TIVOLI100SMD	3800131246776
98TIVOLI150SMD	3800131246783
98TIVOLI200SMD	3800131246790

